


## Bindery stackers – from entry-level to high-speed

for stitched | perfect bound | film wrapped | folded products



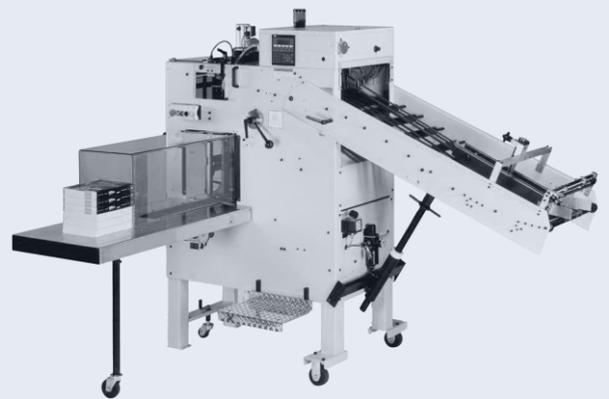


- **RS 11** – entry level bindery stacker
- **RS 10 / RS 10S** – for saddle stitchers | standard & high-speed version
- **RS 33 / RS 33S** – for perfect binders | standard & high-speed version

Technical data	RS 11	RS 10 / RS 10S	RS 33 / RS 33S
product orientation		spine leading	
product format	102 x 320 mm 152 x 470 mm	102 (opt 89) x 320 mm 152 (opt 127) x 470 mm	102 (opt 89) x 320 mm 152 (opt 127) x 470 mm
product thickness	1 - 32 mm	1 - 32 mm	7 - 64 mm (opt. 80 mm)
upper bin	127 mm	127 mm	127 mm
stack height	235 mm	235 mm / 330 mm	235 mm / 330 mm
speed	max 10 000 cph	max 20 000 cph	max 15 000 cph
infeed height	800 - 1054 mm	660 - 990 mm	560 - 914 mm
delivery height		875 mm	
power & voltage	1.5 KVA, 50/60 Hz, 3 ~	1.5 KVA (std), 50/60 Hz, 3 ~ 3 KVA (servo), 50/60 Hz, 3 ~	1.5 KVA (std), 50/60 Hz, 3 ~ 3 KVA (servo), 50/60 Hz, 3 ~
air requirements	85 l/min @ 5,5 bar	85 l/min @ 5,5 bar	170 l/min @ 5,5 bar
weight	500 kg (1,100 lbs)	550 kg (1,200 lbs)	660 kg (1,400 lbs)

*OPTIONS: servo pusher | servo turntable | table-up & stack compression | straight-out delivery | barcode reader*

+++ technical specifications subject to change without prior notice | performance values cannot be guaranteed & depend on product +++

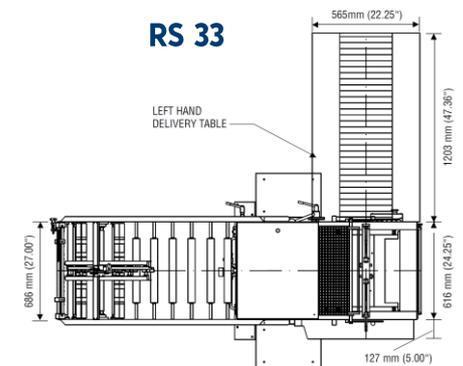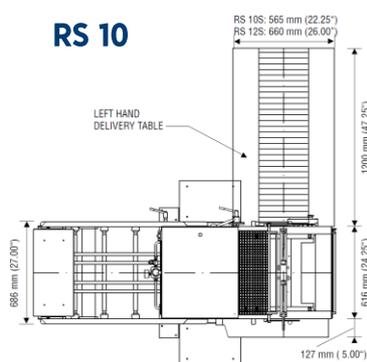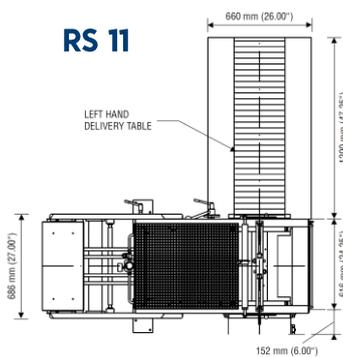

RIMA Atlanta LLC  
3939 Royal Dr NW - Ste 216  
Kennesaw | GA 30144-6486 | USA